



SLEEK DESIGN

Extra-slim format to blend discreetly into the office furniture or floor



ELEGANT FINISHES

Aluminium, bronze, stainless steel, black or white - a perfect match for furniture and decor



SAFETY AND EASE OF USE

Soft opening cover with damper and push & slide locking system

Our sleek new ergonomically designed pop-up boxes provide real ease of use and rapid connection solutions for mobile applications such as PCs, mobile phones, audio and video systems.



FUNCTIONALITY AND FLEXIBILITY

Available in 3, 2x3, 4 and 2x4 modules for custom configuration or ready assembled with low and high current functions

Pop-up type flush-mounting boxes for concrete or raised access floors for floor



Technical characteristics **see opposite**

Can be installed in concrete or raised access floors
Conform to IEC 60670-1, IEC 60670-23, IEC 60884-1 and NFC 61-314

Pack	Cat.Nos	Pop-up boxes to be equipped
		Slim design for perfect integration into the floor Soft opening for enhanced comfort and safety Equipped with "push and slide" locking system to avoid accidental opening by feet To be equipped with Arteor socket outlets For installation use the flush-mounting boxes for concrete floors or the kits for raised access floors
1	0540 10	3 modules
1	0540 15	● Matt Aluminium finish
1	0540 20	● Brushed Brass
		● Brushed Stainless Steel finish
1	0540 12	6 (2 x 3) modules
1	0540 17	● Matt Aluminium finish
1	0540 22	● Brushed Brass
		● Brushed Stainless Steel finish
1	0540 11	4 modules
1	0540 16	● Matt Aluminium finish
1	0540 21	● Brushed Brass
1	0540 26	● Brushed Stainless Steel finish
1	0540 31	● Matt Black
		● Glossy White
1	0540 13	8 (2 x 4) modules
1	0540 18	● Matt Aluminium finish
1	0540 23	● Brushed Brass
1	0540 28	● Brushed Stainless Steel finish
1	0540 33	● Matt Black
		● Glossy White

Pack	Cat.Nos	Installation kits for raised access floors
		Include an empty receptacle and fixing brackets for raised access floor tiles or table tops Equipped with cable retainer for power cables, to ensure increased safety of the installation Compatible with:
1	0540 05	- Cat. 6 data cabling
1	0540 06	- audio/video cabling
1	0540 07	3 modules
1	0540 08	4 modules
		6 (2 x 3) modules
		8 (2 x 4) modules

Pack	Cat.Nos	Flush-mounting boxes for installation in concrete floors
		For installation of pop-up floor boxes in concrete floors Equipped with knockouts for Ø20 and Ø25 mm conduits
1	0540 00	Metal flush-mounting boxes
1	0540 01	3 modules
1	0540 02	4 modules
1	0540 03	6 (2 x 3) modules
		8 (2 x 4) modules

Pop-up type flush-mounting boxes for concrete or raised access floors

Technical characteristics

Classification of pop-up flush-mounting boxes according to
NFC 61-314 / IEC 60670-1 / IEC 60670-23 / IEC 60884-1

Earthing system: $R < 0.05 \text{ Ohms}$
 Protection against mechanical impact: IK 07
 Degree of protection: IP 30 cover open
 IP 40 cover closed
 Resistance to vertical load applied through small surface area:
 1500 N cover open
 3000 N cover closed
 Rated voltage: U 500 V - $R > 5 \text{ MOhms}$
 Electric strength: 2000 V
 Installation on the floor: to be installed on floor subjected to a dry treatment

Material

Halogen free, fire proofed and no propagator of the flame
 Corrosion resistant and to temperature changes


Finishes	Material
Brass	Brass material
Aluminium	Aluminium material
Stainless Steel	Zamak nickel coating
Black	Aluminium material with black painting
White	Aluminium material with white painting

High/low current compatibility

Floor type	High current	Low current
Concrete	Yes	No
Technical floor	Yes	Cat. 6 compatible

Installation


Technical floor



Pop-up size	A ⁽¹⁾ (mm)	B ⁽¹⁾ (mm)
3 modules	108	108
4 modules	108	131
6 modules	108	218
8 modules	108	263

1: +/- 1 mm


Concrete floors (fixing centres)



Pop-up size	A (mm)
3 modules	84
4 modules	106.5
6 modules	194
8 modules	239


Dimensions

Cover

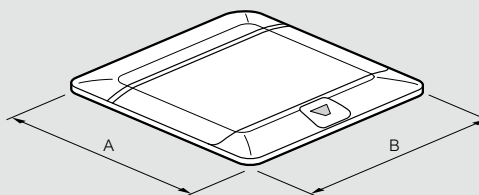


Pop-up size	A (mm)	B (mm)
3 modules	120	120
4 modules	120	142.5
6 modules	120	230
8 modules	120	275

Empty pop-up

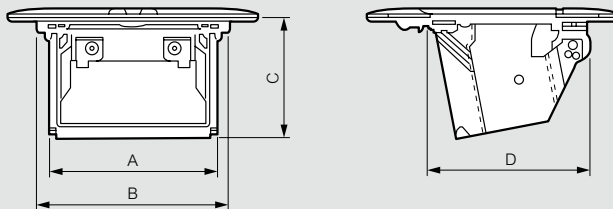

Pop-up size	A (mm)	B (mm)	C (mm)	D (mm)
3 modules	79.8	92	57	77.5
4 modules	102.3	114.5	57	77.5
6 modules	189.8	202	57	77.5
8 modules	231.6	247	57	77.5

Pop-up with installation kit for technical floor

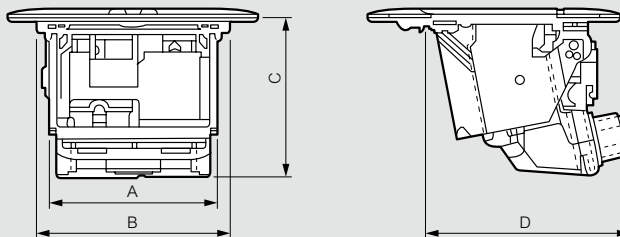

Pop-up size	A (mm)	B (mm)	C (mm)	D (mm)
3 modules	79.8	92	74.8	96.1
4 modules	102.3	114.5	74.8	96.1
6 modules	189.8	202	74.8	96.1
8 modules	231.6	247	74.8	96.1